



Mechanical Seal HBP GS

Operating range

Shaft diameter: $D = 24.5 \dots 360 \text{ mm}$ (0.96" ... 14.17")

Pressure (static and dynamic): $p = \text{up to } 650 \text{ bar}$ (7.977 PSI)

Temperature: $t = -200 \text{ }^\circ\text{C} \dots +230 \text{ }^\circ\text{C}$ (-328 °F ... +446 °F)

Sliding velocity: $v_g = \text{up to } 227 \text{ m/s}$ (744 ft/s)

Materials

- Seal face: Silicon carbide with DLC coating
- Seat: Silicon carbide with DLC coating
- Secondary seals: Polymer rings
- Metal parts: 1.4006, 1.4313-QT650, Inconel® or other stainless steels.

Other materials on request.

Features

- Gas-lubricated
- Uni-directional or bi-directional
- Elastomer-free
- Ready-to-fit cartridge unit
- Single, double, tandem seal and tandem with intermediate labyrinth available
- Separation seals as labyrinths, carbon rings or CobraSeal are optionally available

Advantages


- Wear-free and contact-free operation
- Self-cleaning 3D gas grooves
- High gas film stiffness
- Secure cupped retainer for seat
- Available in various materials for optimized chemical resistance
- Proven, reliable and economical solution

Recommended applications

- Oil and gas industry
- Refining technology
- Petrochemical industry
- Hydrocarbon gas
- Ammonia
- Nitrogen
- Refrigerants
- Air
- Centrifugal compressors
- Turbo expanders
- Blowers

HBrinker Mechanical Seal

Compressor seal Mechanical Seal HBPGS

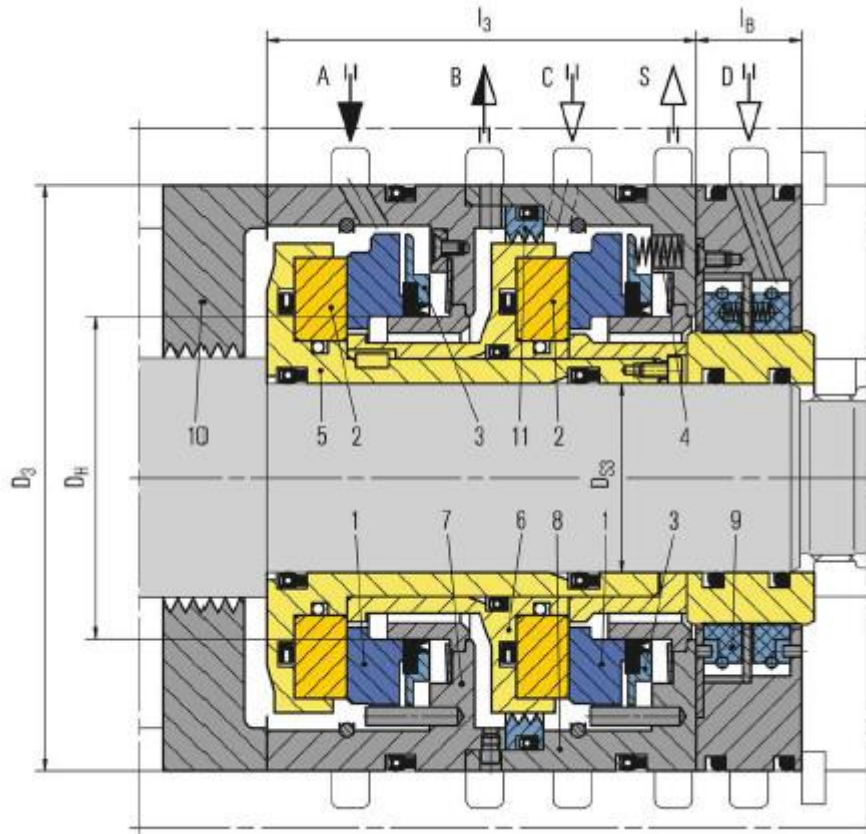

Item	Description
1	Seal face, stationary
2	Seat, rotating
3	Thrust ring
4	Spring
5	Shaft sleeve and seat retainer
6	Intermediate sleeve
7,8	Housing (size matched to installation space)
9	Separation seal (HBSR)
10	Labyrinth
11	Intermediate labyrinth
A	Primary seal gas supply
B	Primary vent
C	Secondary gas seal supply
S	Secondary vent
D	Separation gas supply