



## Mechanical Seal HBSplitex

### Operating range

Shaft diameter:  $d_1 = 50 \dots 150 \text{ mm}$  (1.940" ... 6.000")

Pressure:  $p_1 = 10 \text{ bar}$  (145 PSI)

Temperature:  $t = -40 \dots +150 \text{ }^\circ\text{C}$  (- 40 ... + 300  $^\circ\text{F}$ ), above 80  $^\circ\text{C}$  (175  $^\circ\text{F}$ )  
flush is recommended

Sliding velocity:  $v_g = 10 \text{ m/s}$  (33 ft/s)

Axial movement:  $\pm 1.5 \text{ mm}$  (1/16")

Radial movement:  $\pm 0.8 \text{ mm}$  (1/32")

### Materials

- Seal face: Carbon graphite antimony impregnated (A), Silicon carbide (Q6)
- Seat: Silicon carbide (Q6)
- Secondary seals: FKM (V), EPDM (E), NBR (P)
- Springs: CrNiMo steel (G)
- Metal parts: CrNiMo steel (G)

### Features

- Fully split single seal, 2 x 2 segments, pre-assembled
- Semi-cartridge
- Balanced
- Stationary springs
- Bi-directional
- External pressurization
- Built-in flushing connections
- Installation and wear control

### Advantages


- Reduced repair and downtime: 2 x 2 preassembled design speeds up and simplifies installation because pump does not have to be disassembled.
- Long service life: precise pre-alignment because of pre-assembled segments. Stationary springs which are protected from the product prevent clogging.
- Greater flexibility during installation: no modification necessary because the seal is located outside of the stuffing box.
- Shaft protection: uniform torque transmission via clamping ring prevents damage caused by set screws.
- Dependable operation: mechanical decoupling of clamping ring (torque transmission) avoids distortion of the seat.
- Simple monitoring of the seal during operation because of mechanical wear indicator on the seal face.
- Low leakage: elimination of secondary seals eliminates leakage paths between split components.
- High tolerance to shaft deflections ensured by stationary design and elastic seat mounting (gasket).

### Recommended applications

- Process industry
- Petrochemical industry
- Chemical industry
- Power plant technology
- Pulp and paper industry
- Centrifugal pumps
- Agitators
- Displacement pumps
- Conveying pulp with stock pumps
- Conveying timber to refiners with pumping screws
- Circulation of pulp-and-water mixtures in storage vessels
- Pump stations for waste water treatment
- Cooling water pumps for energy generation

# HBrinker Mechanical Seal

Split seals    Mechanical Seal HBSplitex

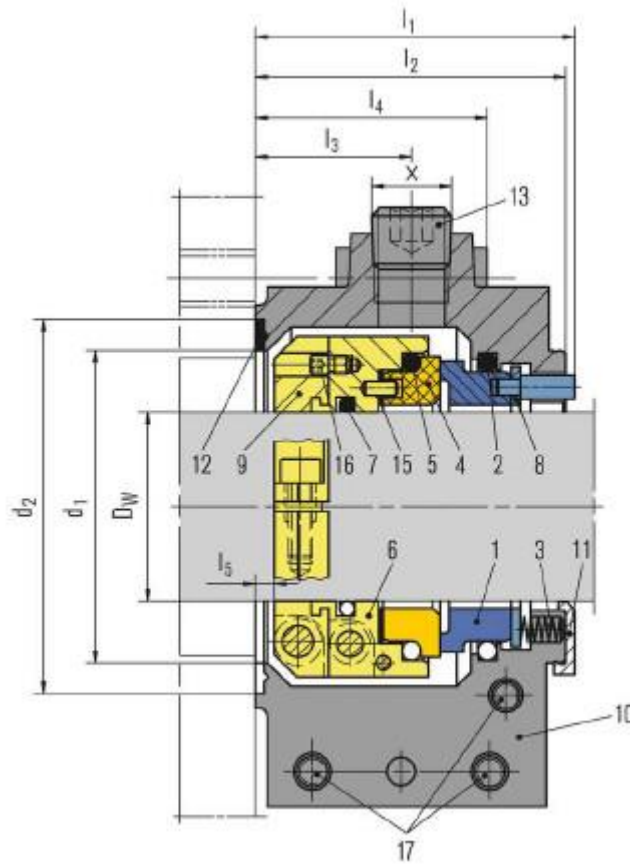

Item	Description
1	Seal face
2,5,7	O-Ring
3	Spring
4	Seat
6	Driver
8	Thrust ring
9	Clamp collar
10	Housing
11	Assembly fixture
12,15	Gasket
13	Head screw plug
14	Mounting plate
16	Set screw
17	Socket head screw

# HBrinker Mechanical Seal

Split seals Mechanical Seal HBSplitex



Dimension Table in millimeter

$d_w$	$d_w$	$d_1$	$d_2$	$d_a$	$a$	$s$	$l_1$	$l_2$	$l_3$	$l_4$	$l_5$	X
50	1.969	75	84	138	88	15	63	61	30	45	3	3/8 NPT
60	2.362	89	101	149	105	17,5	64	62	30	46	3	3/8 NPT
70	2.756	98	113	176	118	20	64	62	30	46	3	3/8 NPT
80	3.150	110	132	191	135	20	65	63	31	47	3	3/8 NPT
90	3.543	121	140	203	145	22	72.5	70.5	31.5	50.5	3	1/2 NPT
100	3.937	131	150	216	155	22	72.5	70.5	31.5	50.5	3	1/2 NPT
110	4.331	142	165	230	170	22	72.5	70.5	31.5	50.5	3	1/2 NPT
120	4.724	152	175	240	180	22	72.5	70.5	31.5	50.5	3	1/2 NPT
125	4.921	162	185	268	190	26	89.5	87.5	43.5	62.5	4	1/2 NPT
140	5.512	175	200	303	205	26	89.5	87.5	43.5	62	4	1/2 NPT
150	5.906	188	215	308	220	26	89.5	87.5	43.5	62.5	4	1/2 NPT

v